



SPECIFICATION

8'6"W x 28'L Transportable Comfort Station
Wide Body Advantage Series

CHASSIS & FRAME:

Heavy duty 12"x 4" 16lb. structural steel wide flange main beams

2"x 2"x 16 ga. primed steel tubing floor joists 16" o.c.

Heavy duty extruded aluminum top rail

One (1) 10,000 lb. tongue mounted frame jack

Four (4) 7,000 lb. leveling jacks, one at each corner

Three (3), axles with electric brakes and emergency breakaway kit

2 5/16" ball hitch, bumper pull

Front platform

Rear platform including utility room with 300 gallon fresh water tank (Include gap under rear handrail for drainage)

Do not install non skid coating on steps, install non skid tape on steps

Do not install DOT reflective tape on trailer, only install on tongue

EXTERIOR WALLS, ROOFING & INSULATION

2x4 wood wall studs 16" o.c.

2x6 wood roof rafters 16" o.c.

R-11 insulation in walls, ceiling and floor

Seamless FRP Exterior, white

.040 thick seamless one piece aluminum roof, maintenance free, fastened to the top rail with all fastener penetrations located outside the unit to eliminate water leaks

INTERIOR WALL, CEILING & FLOORING

Fiberglass Reinforced Plastic (FRP) laminated to 3/8" plywood on interior walls and ceiling with **corner seams vinyl trimmed** and sealed with a high quality silicone sealant to provide a very durable and waterproof interior

3/4" Advantek sub flooring

Mannington Commercial linoleum floor, Clove 5644 with grey cove base

Advantage plus package consisting of a wainscot #4925 Calcutta Marble laminate, matching laminate valance, and large decorative mirrors

Enclosed stall walls to have Calcutta Marble wainscot and full length hollow core white doors with white wood door frames. Stall walls will have a 6" space at the bottom of the wall and a 12" space at the top of wall

Split option including two divider walls with 2 stalls, and storage room located in middle of trailer. Doors on divider walls to be removable

ELECTRICAL

Indirect interior lighting with laminate trimmed valance and **LED fluorescent bulbs**, operated by a breaker
Two roof mounted A/C units, **ducted in roof**, with 13,500 BTU's cooling and 5.600 BTU's heating
20 amp, NEMA 3R (weathertite) panel box(es), located in pump compartment
120v/60hz/1ø.
Wall mounted thermostats in locking boxes
DOT approved running lights
Wall mounted exterior lights at Entry/Exit doors
One stereo system with CD player, am/fm radio, auxiliary port, and two ceiling mounted speakers on each side, stereo located inside vanity (antenna mounted on exterior near roof line)

PLUMBING & INTERIOR FACILITIES

A ¾" fresh water connection with pressure regulator is included
A waste water connection with 3" slide valve with 2" camlock fitting and cap is included
Steel waste tank, coated with a coal tar epoxy, mounted under trailer with cleanout and sight glass
Enclosed stalls (4 on Women's side, 2 in middle, and 2 on Men's side), each with full length white hollow core wood door with brush nickel lever set door handle, white wood door frame, laminate wainscot on stall walls, white vinyl trim, low consumption foot flush toilet, and coat hook.
Install one small floor drain next to toilet in each room
Cultured marble silver pearl tops with sinks (with trash can receptacle hole in between sinks, ¾" standard bull nose edge, backsplash back and side, and veining running from bottom left to upper right) and **water saving faucets, mounted on locking aluminum vanity cabinets, painted white, and with decorative mirrors**
Men's vanity to include two 24" vanity cabinets with 71" +/- marble top and trash receptacle hole in middle (to be 19" of open space under trash hole for trash can, in between cabinets)
Four (4) wall hung urinals with grey plastic urinal blinds and urinal wall top
14"x 14" domed skylight roof vents with aerodynamic covers
300 gallon fresh water tank mounted in utility room on rear platform. Pump to be on demand Grundfos smart pump, installed in vanity cabinet under sink.
Increase freshwater tank drain size to 2" drain down (no plastic valve) with 2" male cam lock fitting and cap

DOORS & STEPS


Heavy duty custom built ACSI SIP doors with weather protective neoprene bulb seal, drip shield, continuous hinge with vinyl dust cover, hydraulic closer, pull handle and dead bolt locks keyed alike
Heavy duty fold-out steps with large platforms and fold out aluminum handrails

NOTE:

1. In a continuing effort to improve products, pricing and contents are subject to change without notice.
2. Not included are trash receptacles, soap dispensers and paper towel dispensers.
3. Engineered drawings and code compliance are not included in this quotation.

CONFIDENTIAL DATA
DO NOT DISCLOSE

PROPERTY INFORMATION
DO NOT DUPLICATE

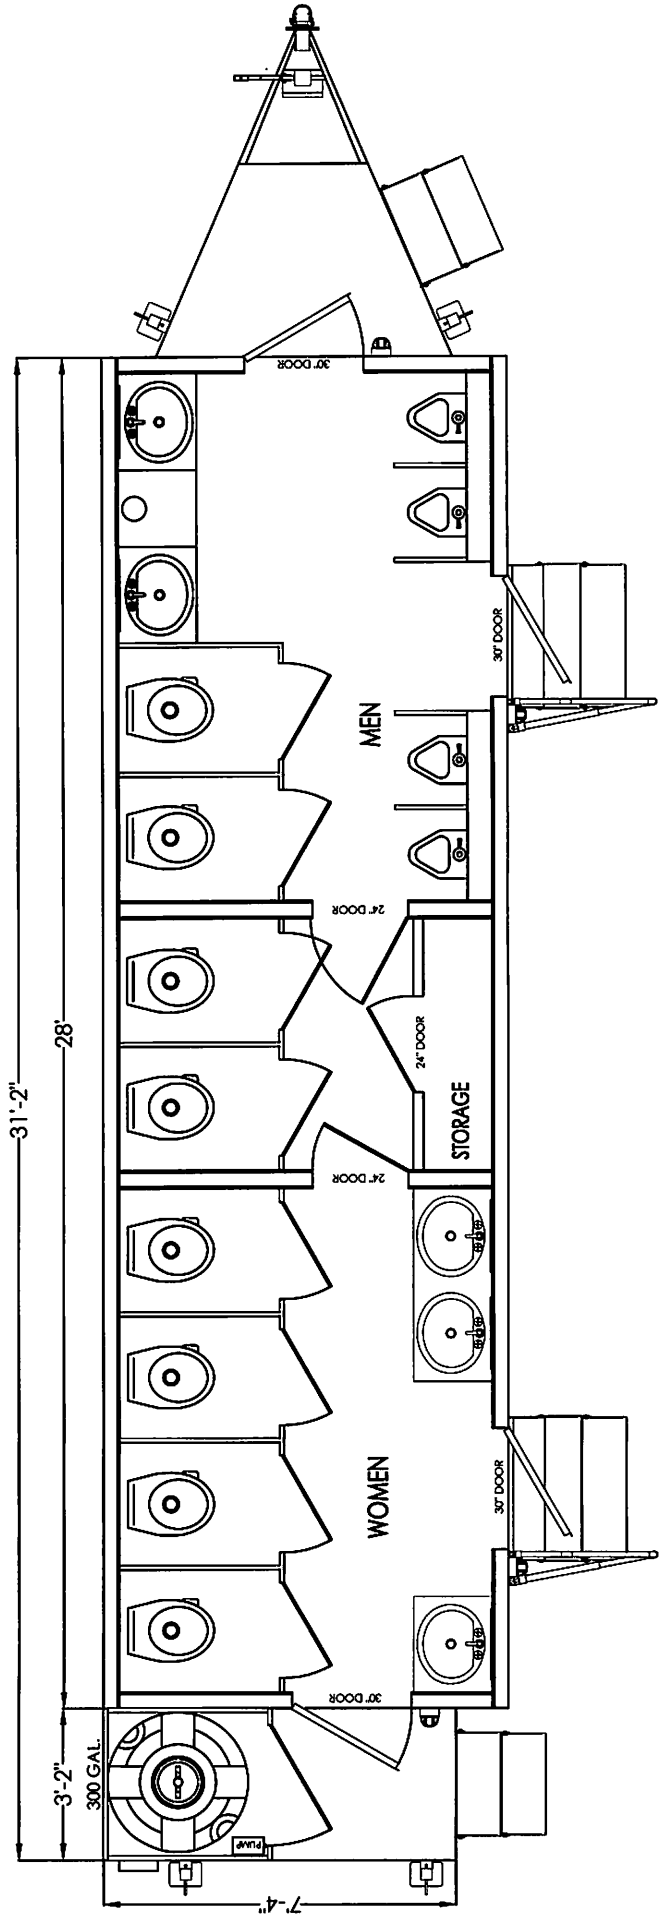

| | | | | | | | | | | | |
|--|--|--|--|-------------------------------------|--|-----------------------------------|--|---|--|---|--|
| ADVANCED CONTAINMENT SYSTEMS INC. Houston, Texas © ACS 1999. Right Reserved | | REVISIONS 1. 1. 2. 3. | | DATE | | BY | | TITLE: RESTROOM TRAILER FLOOR PLAN-V6 8'-6" X 28'-0" | | DRAWER: FR DATE: 06-18-14 DWG# 140609047 | |
| | | | | | | | | CHECKED: | | REV. R1 06-27-14 | |
| | | | | | | | | APPROVED: | | SHEET 1 OF 1 | |